

SPECIFICATIONS

RATINGS:
 20A 125VAC, 15A 277VAC [UL, cUL]
 2HP 125-250VAC, 1.5HP 125-250VAC
 16(8)A 250V~, 12(6)A 250V~ [S, ENEC]

CONTACT RESISTANCE:
 35mΩ Max.

INSULATION RESISTANCE:
 100MΩ at 500VDC

WITHSTAND VOLTAGE:
 1,500VAC For 1 Minute

ELECTRICAL LIFE:
 >10,000 Cycles





MATERIAL:

BODY: PA66



ACTUATOR: PA66

CONTACTS: Silver Alloy


TERMINALS: Silver Plated Copper

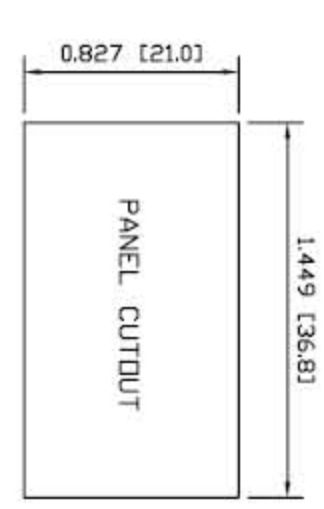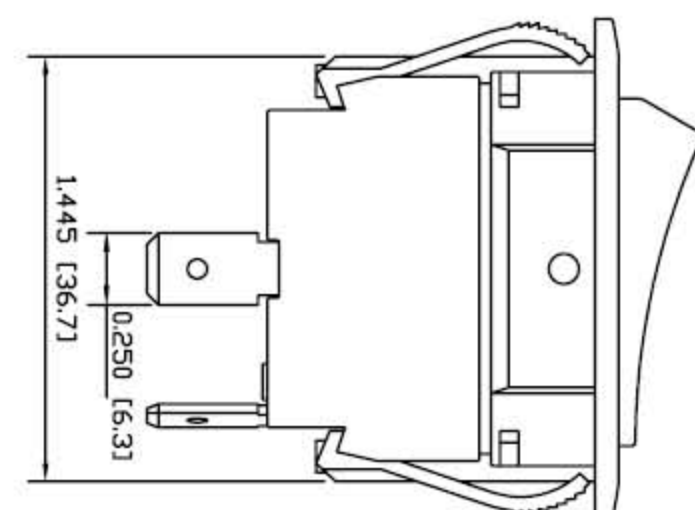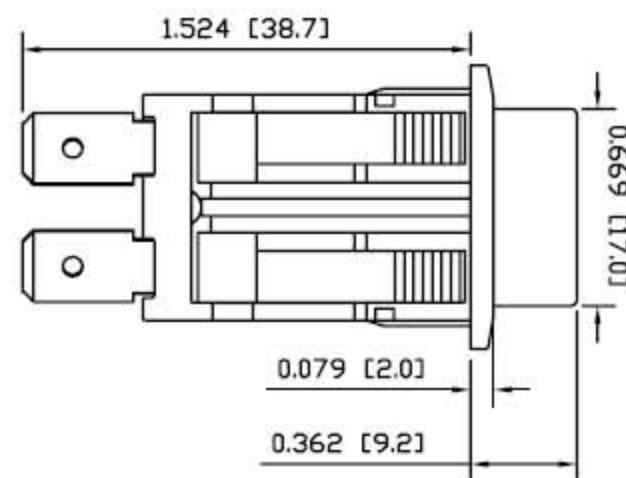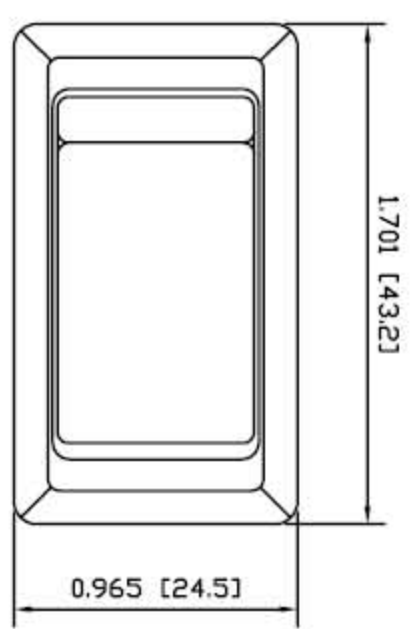

How to Order:

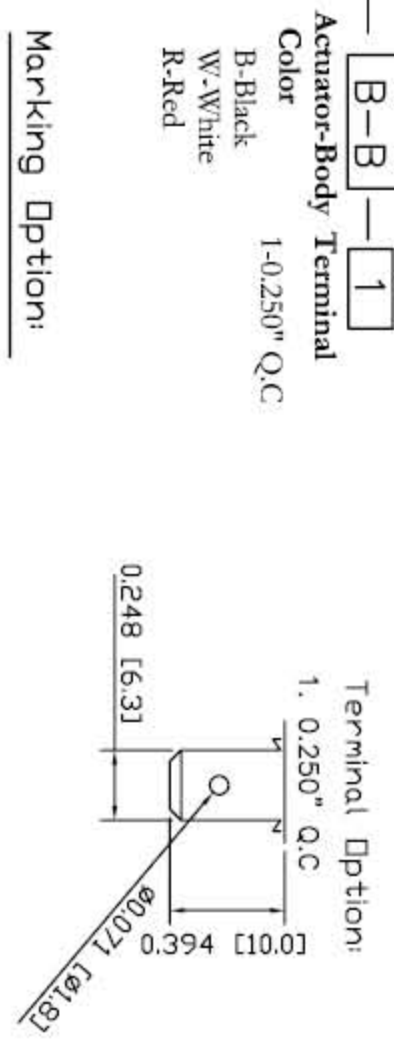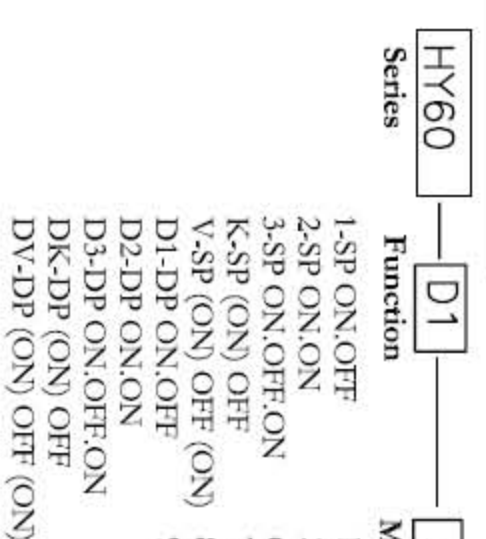

Marking Option:

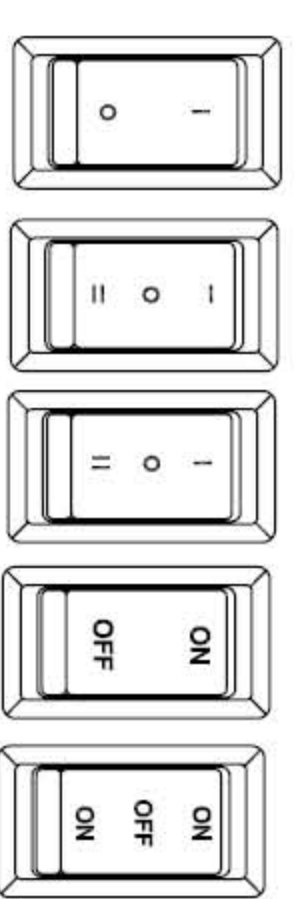

PHASEDA LLC

HY60 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TOLERANCES: DEC. X±0.2

DRAWING NOT TO SCALE

DATE: JAN 2007

8

7

6

5

4

3

2

1

D

C

B

A