

SPECIFICATIONS

RATINGS:
 15A 125VAC, 7.5A 250VAC UL, cUL
 1/2HP 125-250VAC 105°C UL, cUL
 10(8)A 250VAC 1E4 T120 TUV

CONTACT RESISTANCE:
 20mΩ Max.

INSULATION RESISTANCE:
 100MΩ at 500VDC

WITHSTAND VOLTAGE:
 1,500VAC For 1 Minute





ELECTRICAL LIFE:
 >10,000 Cycles

MATERIAL:
 BODY: PA66

ACTUATOR: PA66, PC for Illumination len


CONTACTS: Silver Alloy

TERMINALS: Silver Plated Copper

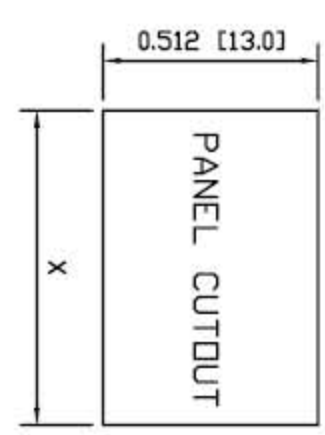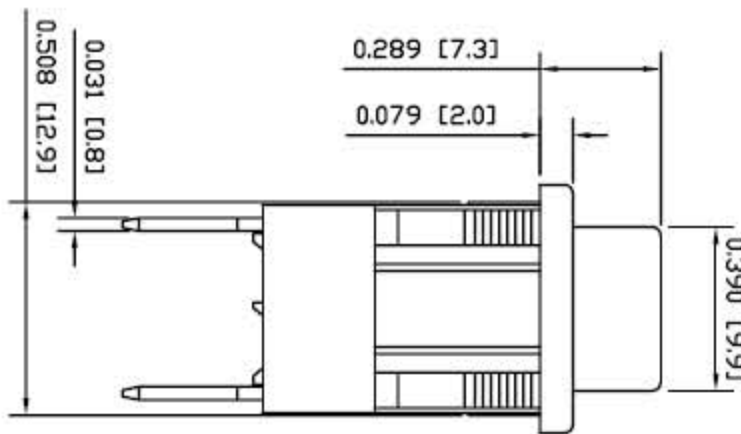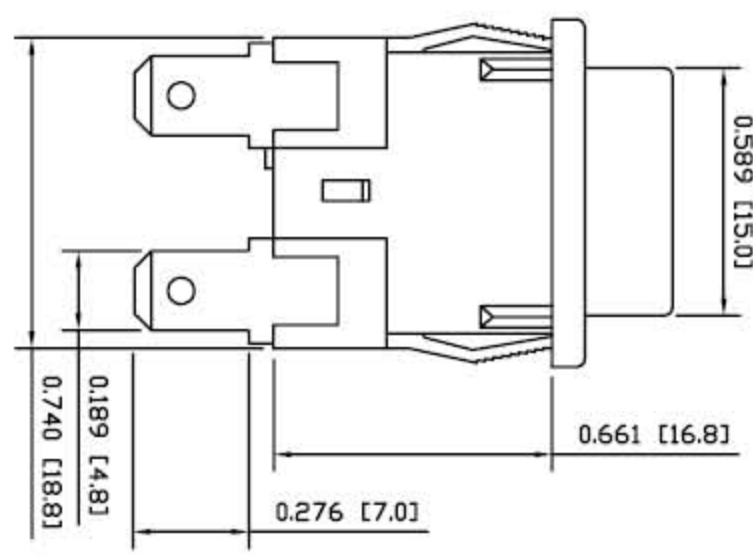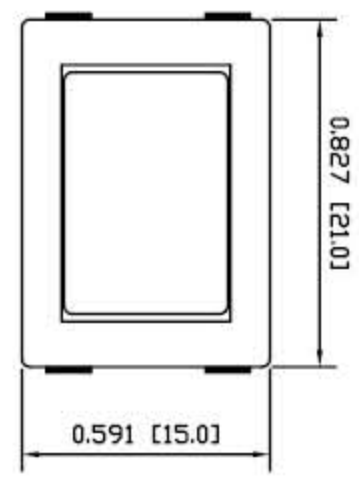


PANEL THICKNESS	X
0.020~0.047 [0.5~1.2]	0.748 [19.0]
0.047~0.079 [1.2~2.0]	0.760 [19.3]
0.079~0.118 [2.0~3.0]	0.772 [19.6]


Actuator Option:

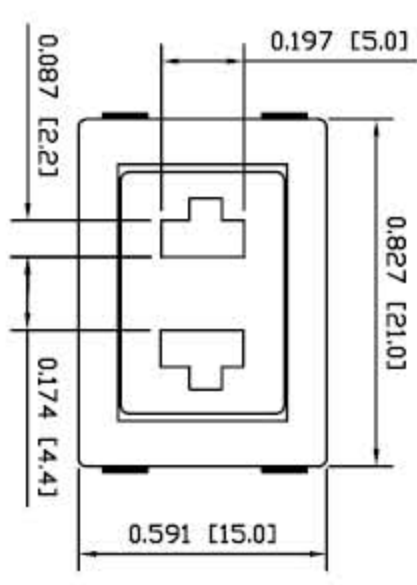

How to Order:

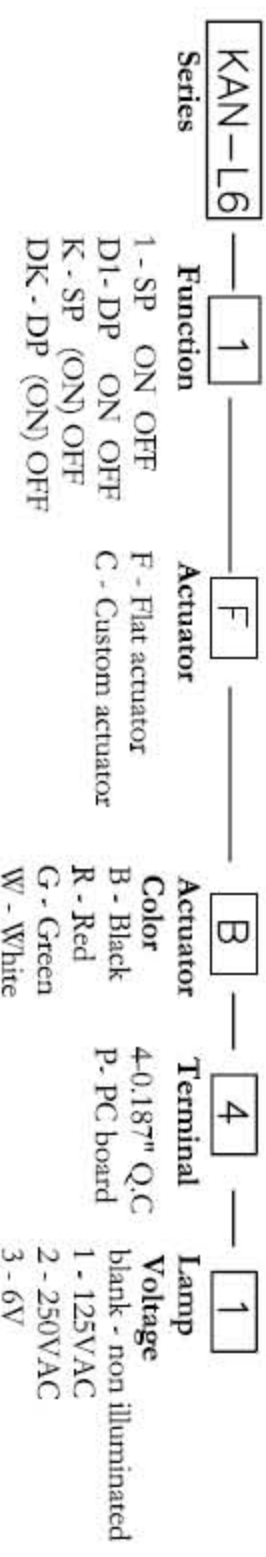

Terminal Option:
 P. PC board terminal

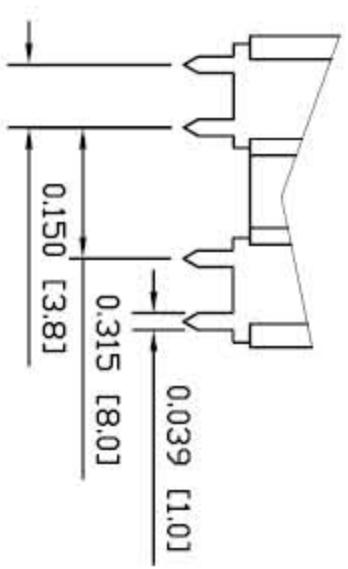

PHASEDA LLC

KAN-L6 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TOLERANCES: DEC. X±0.2

DRAWING NOT TO SCALE

DATE: JAN 2007

8

7

6

5

4

3

2

1

D

C

B

A