

8 7 6 5 4 3 2 1

SPECIFICATIONS

RATINGS:




12A 1/2HP 120VAC
 16A 2HP 220-240VAC, UL cUL
 16(12)A 250V~ SE4 TUV
 10(8)A 250V~ VDE

VOLTAGE / FREQUENCY:
 120VAC / 60Hz, 240VAC / 50 Hz
 (other options available as well)


ELECTRICAL LIFE:
 >10,000 Cycles

MATERIAL:


BODY: PA66
ACTUATOR: PA66, Green + Red
CONTACTS: Silver Alloy
TERMINALS:
 Silver Plated Copper

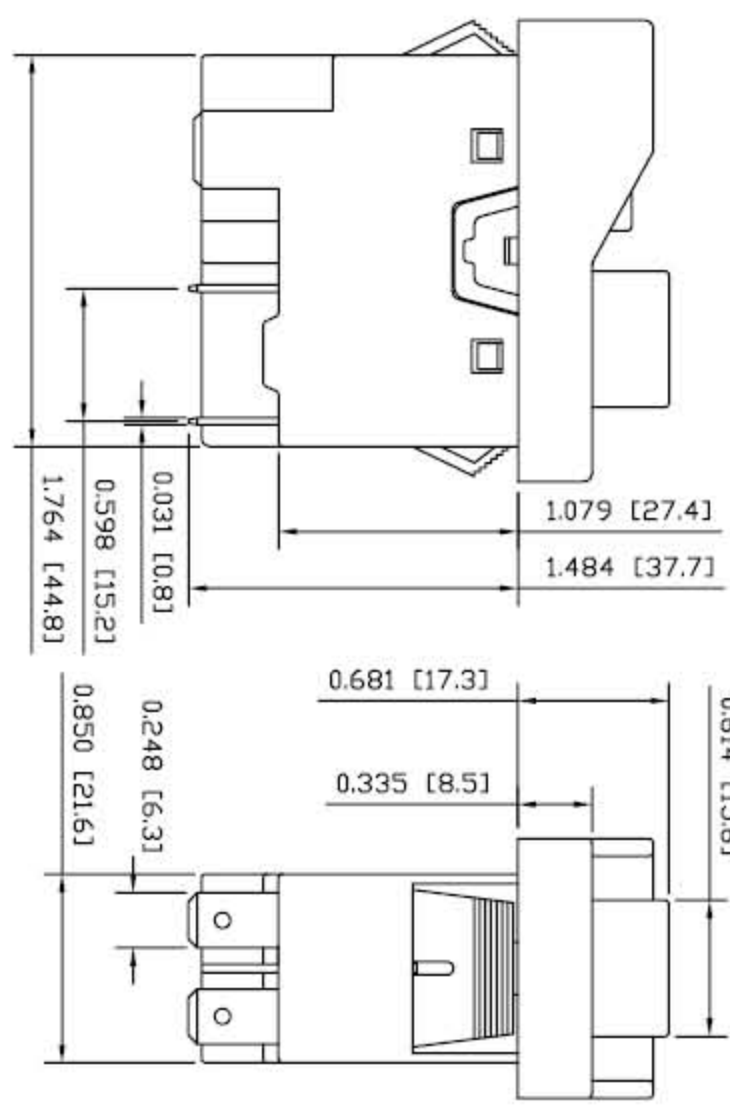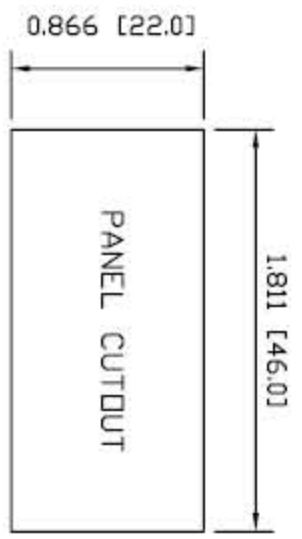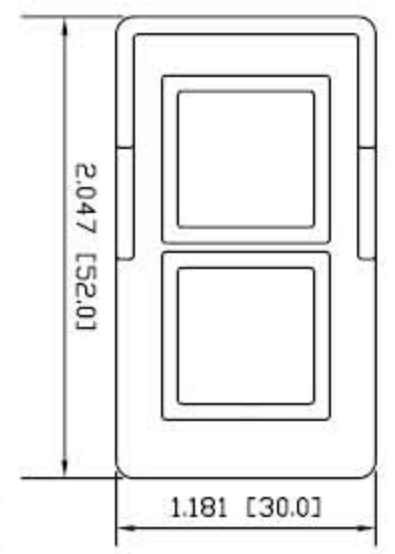

How to Order: Electro-magnetic Switch for under-voltage protection

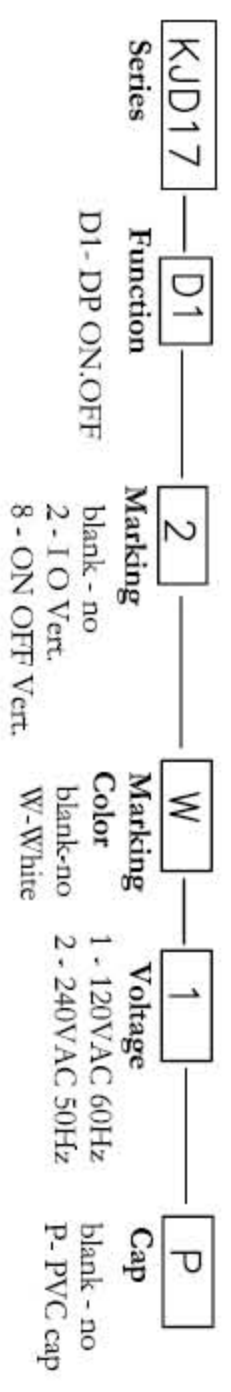

Marking Option:



PHASEDA LLC

KJD17 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
 DIMENSIONS ARE IN INCHES [MILLIMETERS]
 TOLERANCES: DEC .X±0.2 DRAWING NOT TO SCALE DATE: JAN 2007

8 7 6 5 4 3 2 1

D

C

B

A