

SPECIFICATIONS

RATINGS:

20A 125VAC, 12A 250VAC UL, cUL
 20A 36VDC 85°C UL, cUL
 18(16)A 1250V~ TUV
 12(10)A 250V~ TUV

CONTACT RESISTANCE:

35mΩ Max. at 50VDC

INSULATION RESISTANCE:

100MΩ at 500VDC

WITHSTAND VOLTAGE:

1,500VAC For 1 Minute

ELECTRICAL LIFE:

>10,000 Cycles

MATERIAL:


BODY: PA66

ACTUATOR: PA66


CONTACTS: Silver Alloy

TERMINALS: Silver Plated Copper


SEALING: Rubber

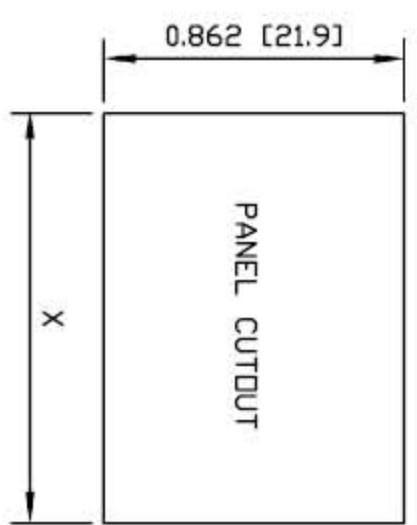


PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	1.169 [29.7]
0.049~0.079 [1.25~2.00]	1.181 [30.0]
0.079~0.118 [2.00~3.00]	1.189 [30.2]

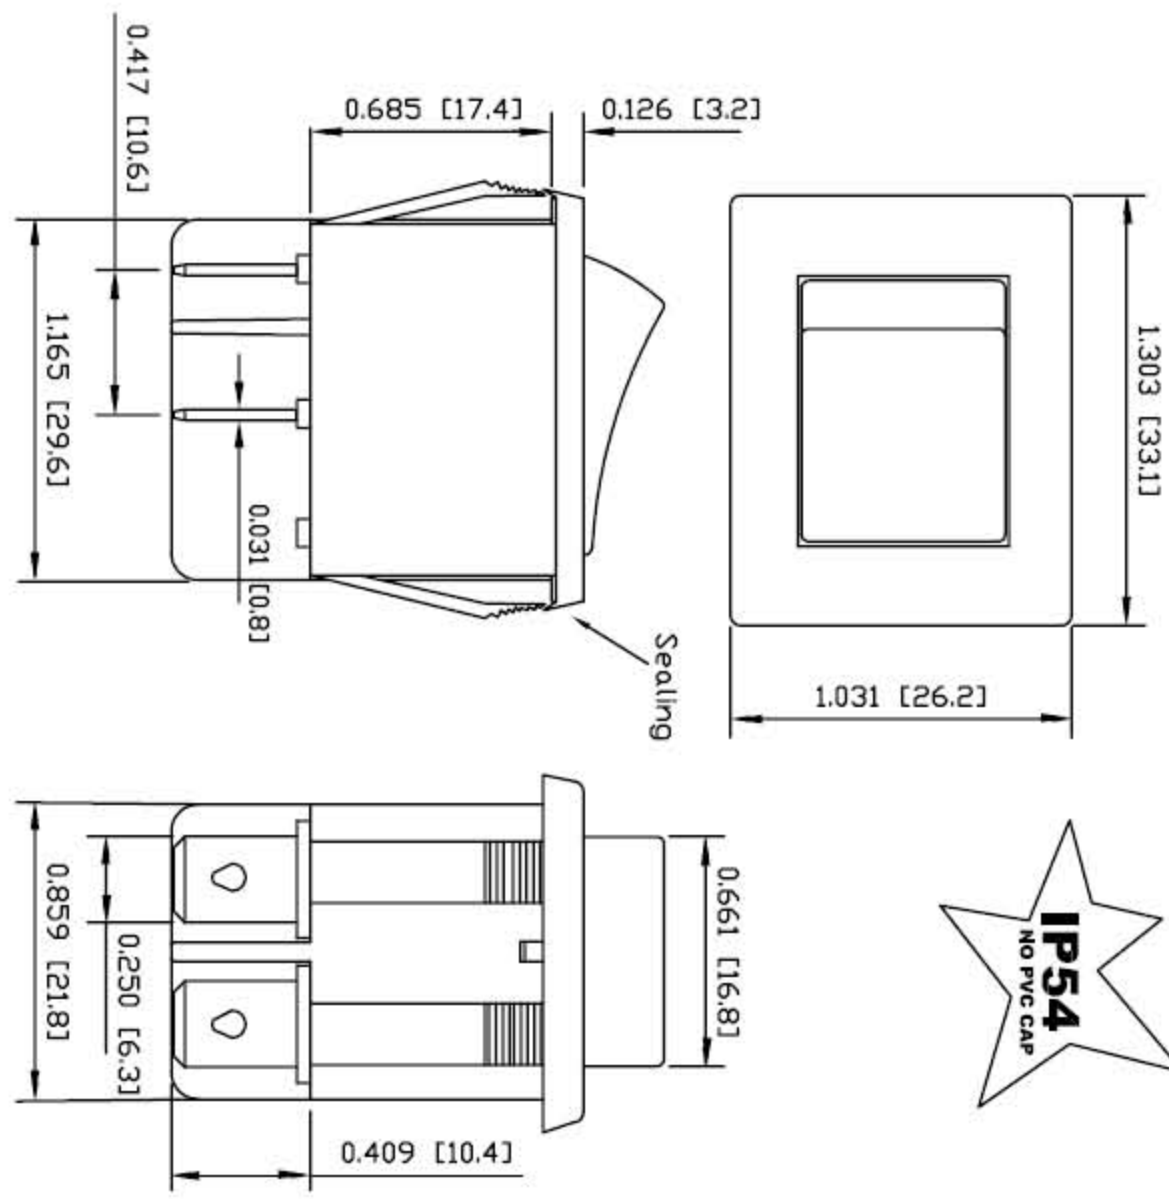

How to Order:

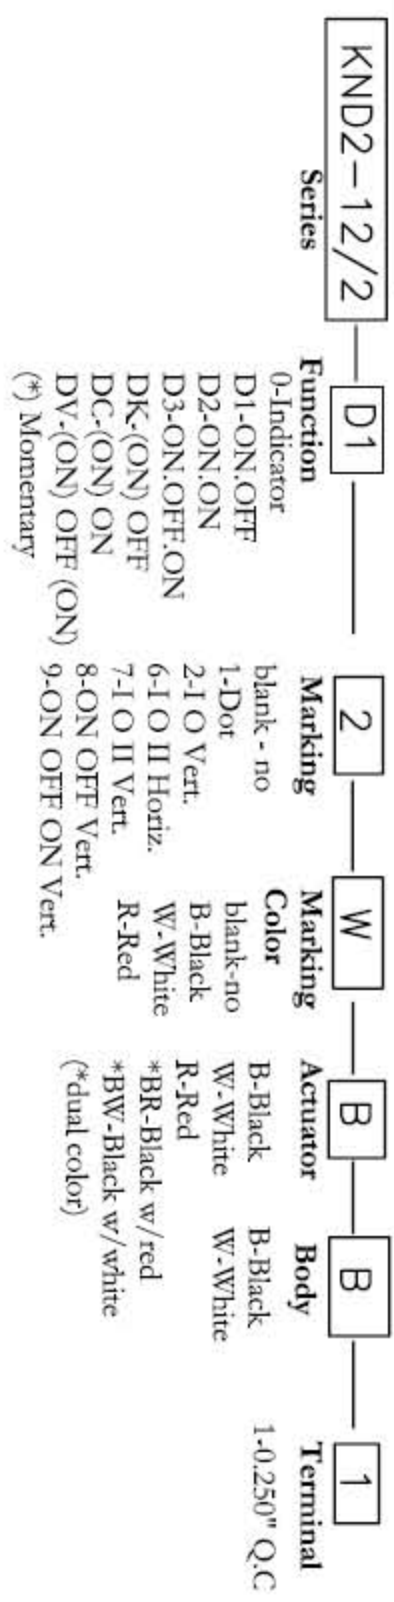

Marking Option:

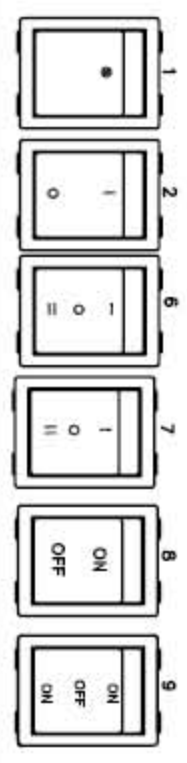

Bi-color Actuator



PHASEDA LLC

KND2 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TOLERANCES: DEC .X±0.2

DRAWING NOT TO SCALE

DATE: JAN 2007