

8 7 6 5 4 3 2 1

A

SPECIFICATIONS

RATINGS:
 16A 125VAC, 8A 250VAC UL,cUL
 16(4)A 250V~ 1E4 T125 VDE
 16(8)A 250V~ 1E4 T125 VDE

CONTACT RESISTANCE:
 35mΩ Max 50VDC

INSULATION RESISTANCE:
 100MΩ at 500VDC Min.

WITHSTAND VOLTAGE:
 1,500VAC For 1 Minute

ELECTRICAL LIFE:
 >10,000 Cycles

B




MATERIALS

BODY:
 PA66


ACTUATOR:
 PA66, PC for illuminated rocker

CONTACT:
 Silver Alloy

TERMINALS:
 Silver Plated Copper

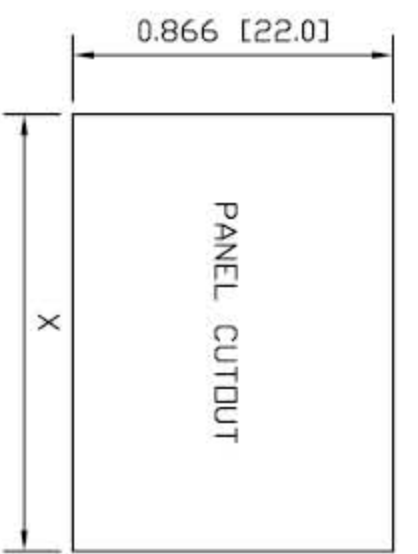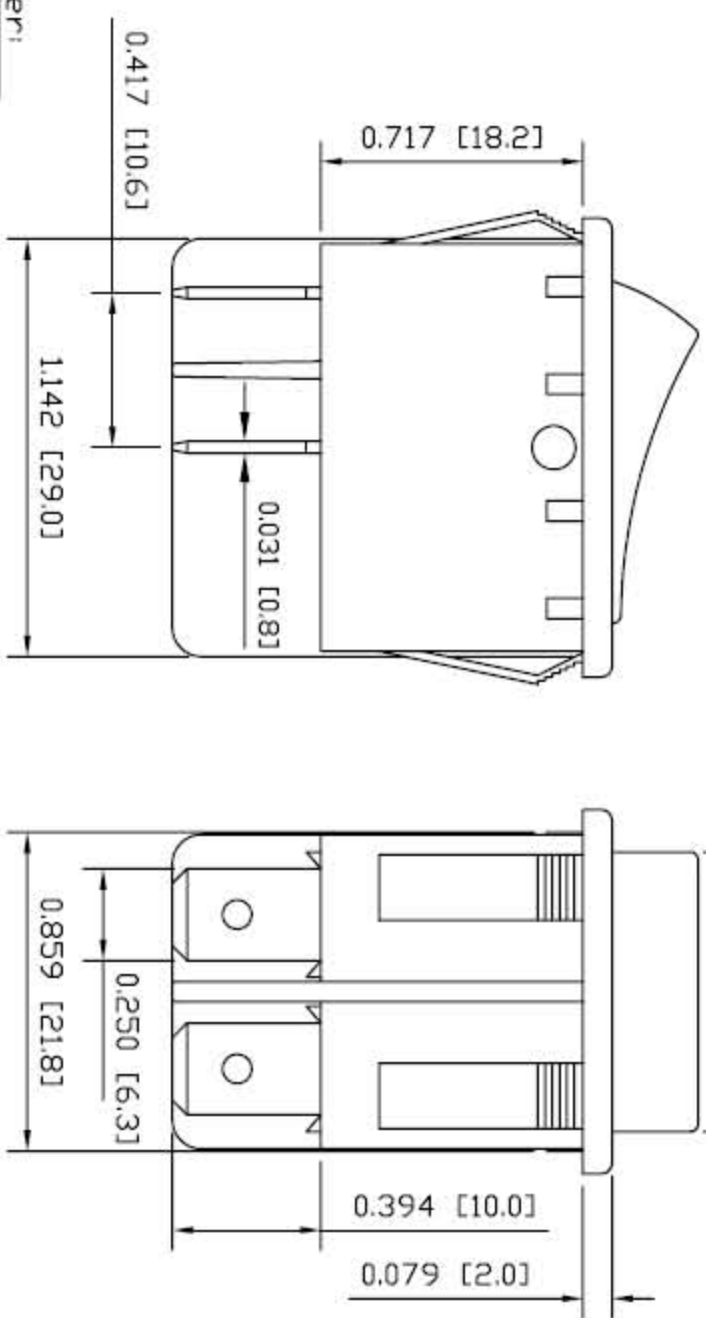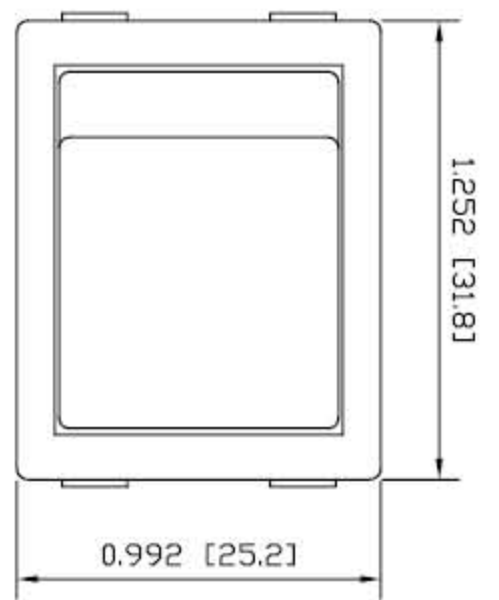


PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	1.181 [30.0]
0.049~0.079 [1.25~2.00]	1.189 [30.2]
0.079~0.118 [2.00~3.00]	1.197 [30.4]

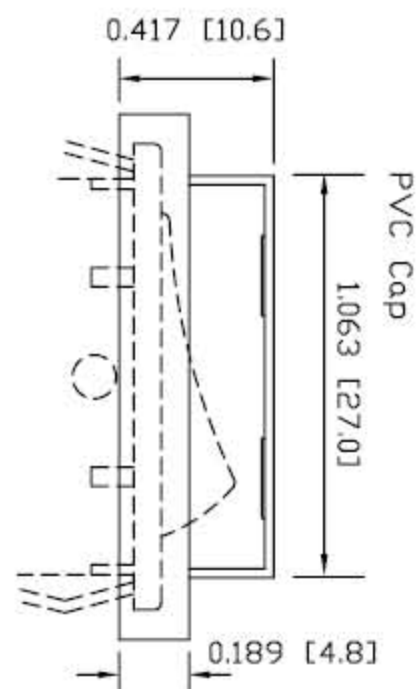


C


How to Order:

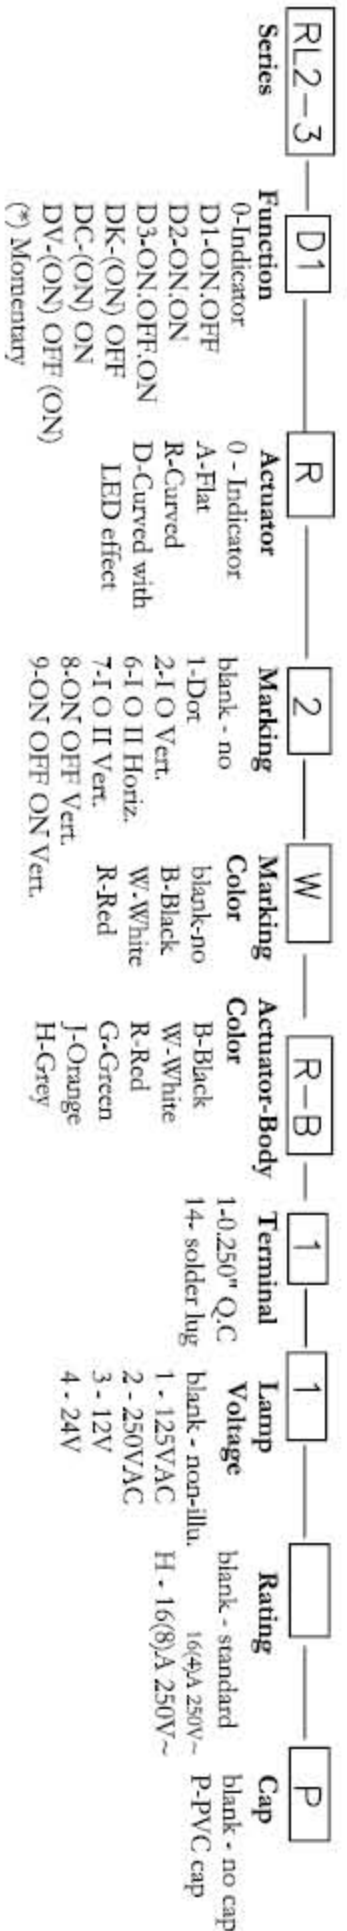

Marking Option:

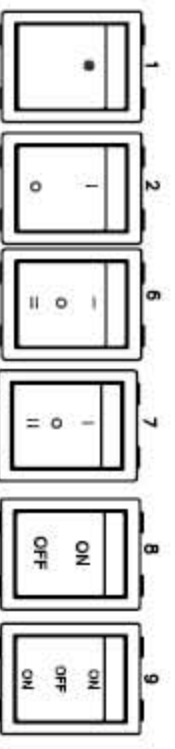

Terminal Option:

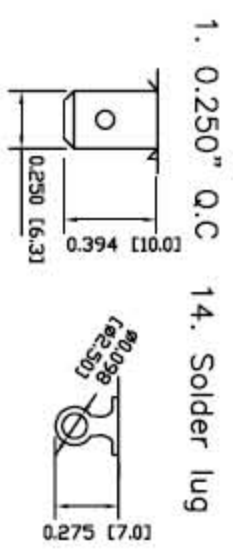

D



PHASEDA LLC

RL2-3 series

8 SPECIFICATION SUBJEC TO CHANGE WITHOUT PRIOR NOTICE **7** DIMENSIONS ARE IN INCHES [MILLIMETERS] **6** TOLERANCES: DEC .X±0.2 **5** DRAWING NOT TO SCALE **4** DATE: JAN 2007 **3** **2** **1**