

8 7 6 5 4 3 2 1

A SPECIFICATIONS



RATINGS:
10A 125VAC, 105°C UL/cUL
6(2)A 250V~ T125 VDE

CONTACT RESISTANCE:
35mΩ Max 50VDC

INSULATION RESISTANCE:
100MΩ at 500VDC Min.

WITHSTAND VOLTAGE:
1,500VAC For 1 Minute

ELECTRICAL LIFE:
>10,000 Cycles

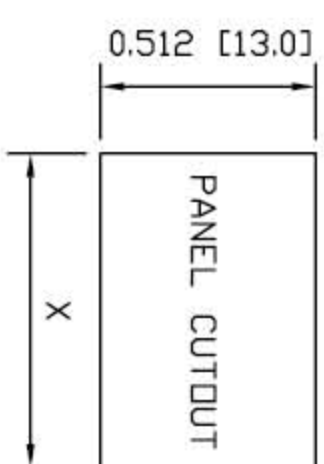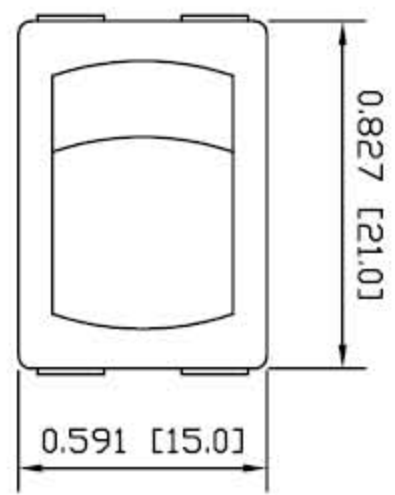

PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	0.756 [19.2]
0.049~0.079 [1.25~2.00]	0.764 [19.4]
0.079~0.118 [2.00~3.00]	0.772 [19.6]


B MATERIALS

BODY:
PA66




ACTUATOR:
PA66

CONTACT:
Silver Alloy

TERMINALS:
Silver Plated Copper

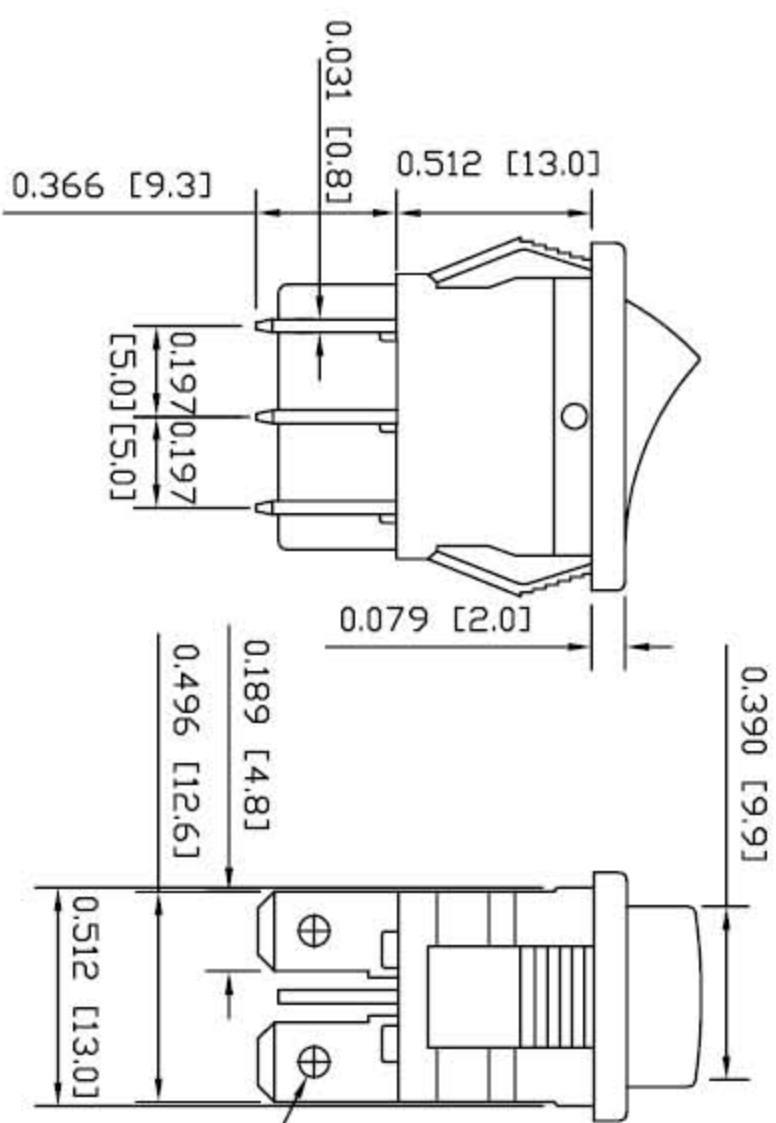

C How to Order:

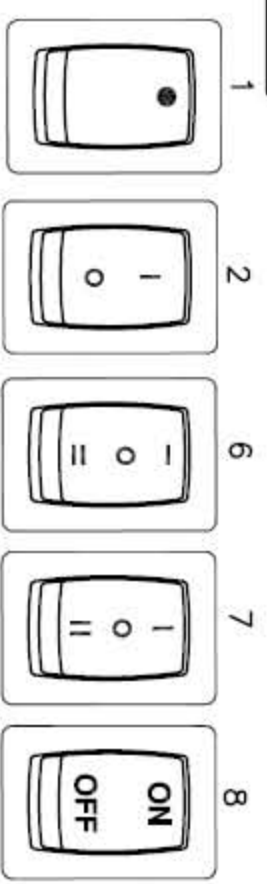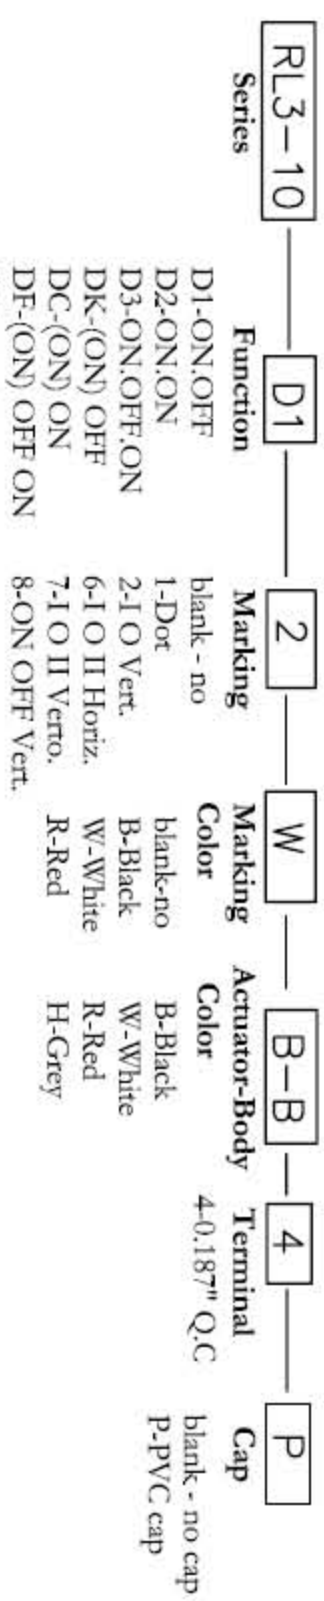

PHASEDA LLC

RL3-10 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TOLERANCES: DEC. X±0.2

DRAWING NOT TO SCALE

DATE: JAN 2007

8 7 6 5 4 3 2 1

D

C

B

A