

8 7 6 5 4 3 2 1

A SPECIFICATIONS

RATINGS:



- 16A 125VAC, 10A 250VAC UL, cUL
- 1/3A 125-250VAC 105°C UL, cUL
- 10(4)A 250V~ 1E4 T125 VDE
- 10A 125VAC UL, cUL
- 6(2)A 250V~ 1E4 T125 VDE

CONTACT RESISTANCE:
35mΩ Max 50VDC




INSULATION RESISTANCE:
100MΩ at 500VDC Min.

WITHSTAND VOLTAGE:
1,500VAC For 1 Minute

ELECTRICAL LIFE:
>10,000 Cycles

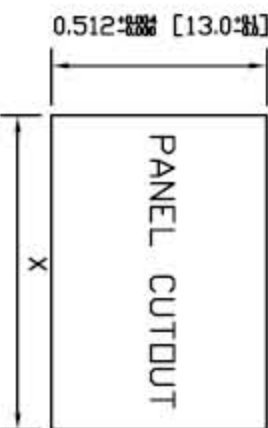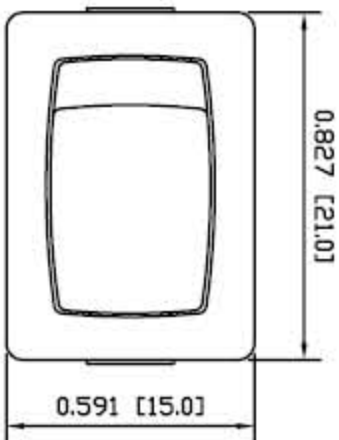

PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	0.756 [19.2]
0.049~0.079 [1.25~2.00]	0.764 [19.4]
0.079~0.118 [2.00~3.00]	0.772 [19.6]

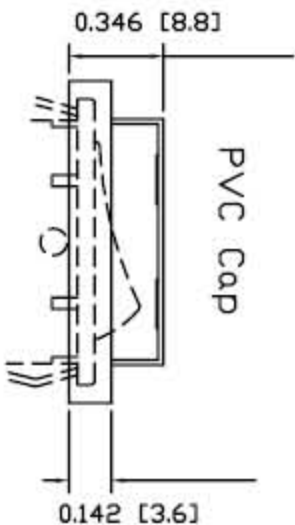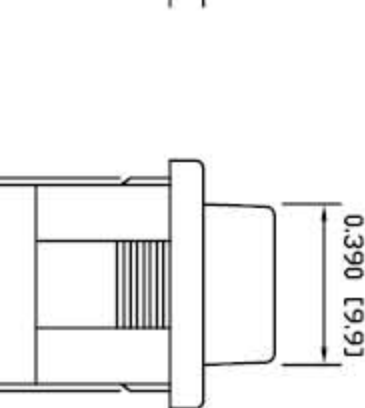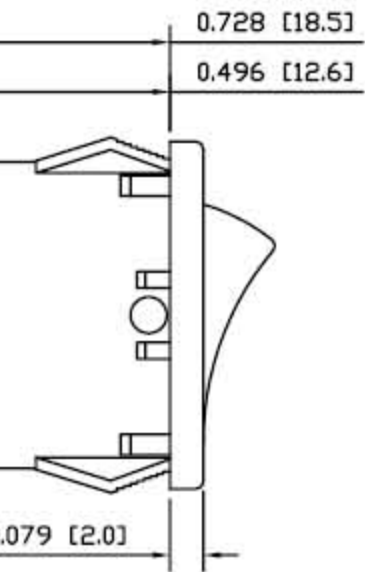

B MATERIALS


BODY:
PA66

ACTUATOR:
PC


CONTACT:
Silver Alloy

TERMINALS:
Silver Plated Copper


How to Order:

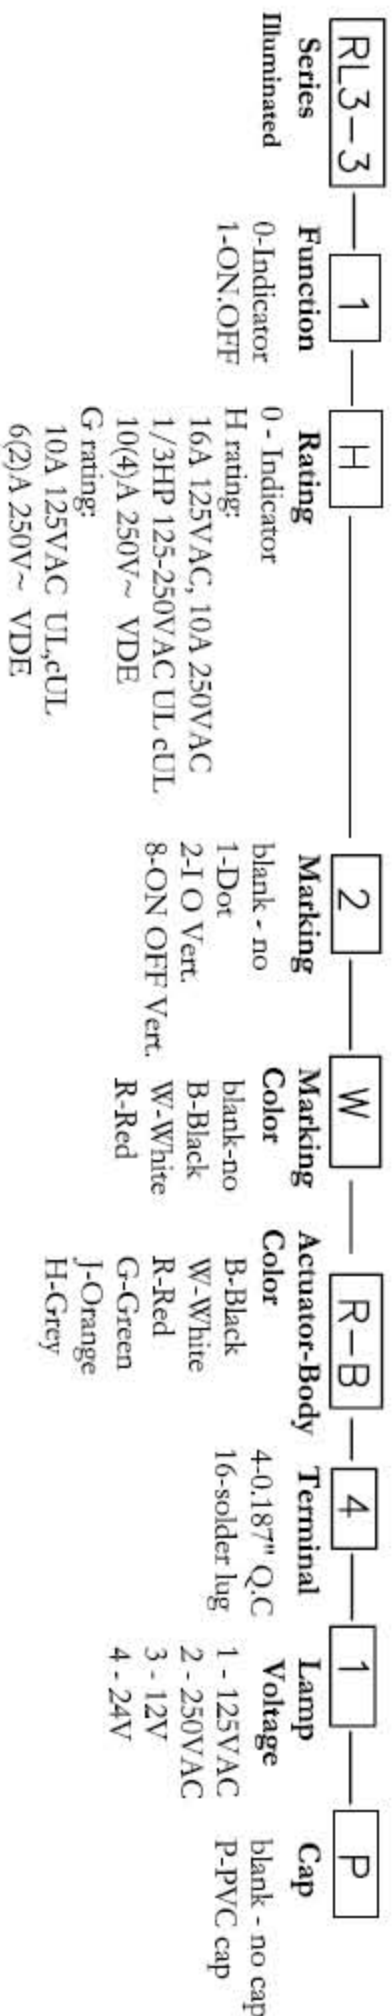

Marking Option:

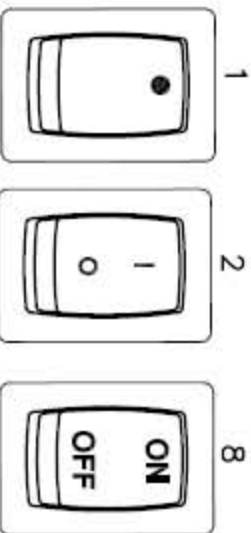

Terminal Option:

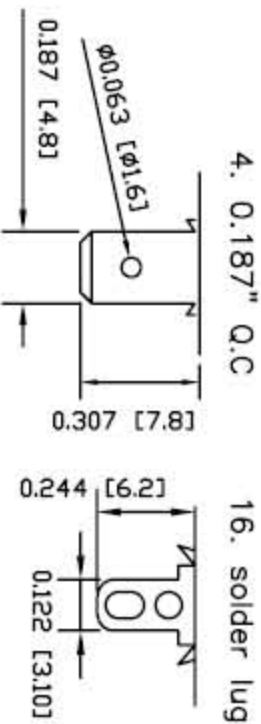

C

D



PHASEDA LLC

RL3-3 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TOLERANCES: DEC .X±0.2

DRAWING NOT TO SCALE DATE: JAN 2007

8 7 6 5 4 3 2 1

D

C

B

A