

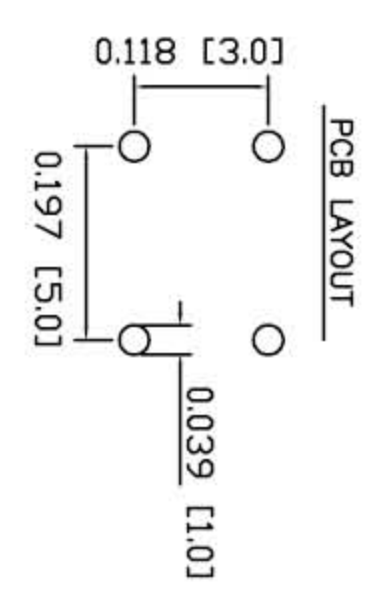




8 7 6 5 4 3 2 1

A

SPECIFICATIONS
FUNCTION:
 1P1T OFF-(ON)
RATINGS:
 50mA 12VDC
OPERATING FORCE:
 170±30gf
TRAVEL:
 0.010±0.004 [0.25±0.1]

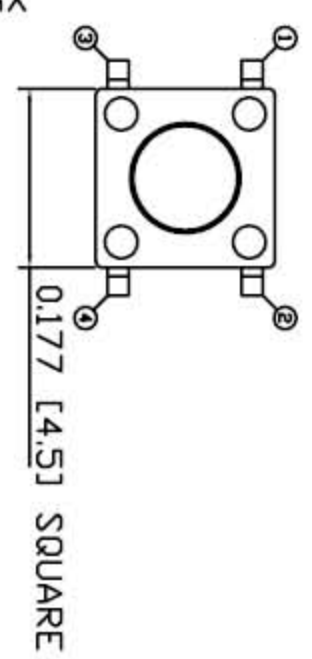


CONTACT RESISTANCE:
 50mΩ Max. at 10mA 5VDC
INSULATION RESISTANCE:
 100MΩ at 100VDC
WITHSTAND VOLTAGE:
 250VAC For 1 Minute
ELECTRICAL LIFE:
 100,000 Cycles
TEMPERATURE:
 Operation: -15°C to 60°C
 Storage: -30°C to 80°C
SOLDERING:
 Wave soldering: 260°C Max. for less than 5 seconds
 Hand soldering: 30watt iron Max. at 320°C for approx. 2 seconds
 Solvent washing: non-washable

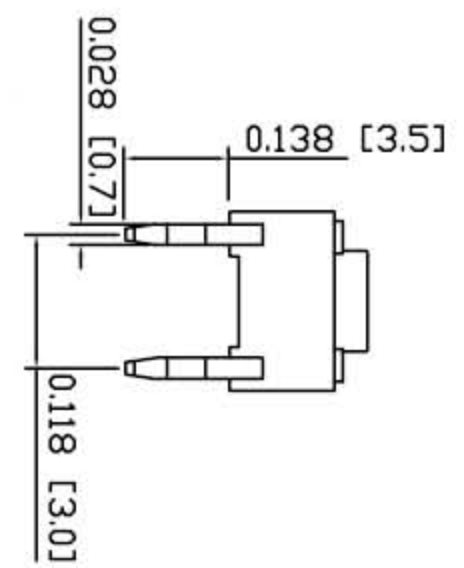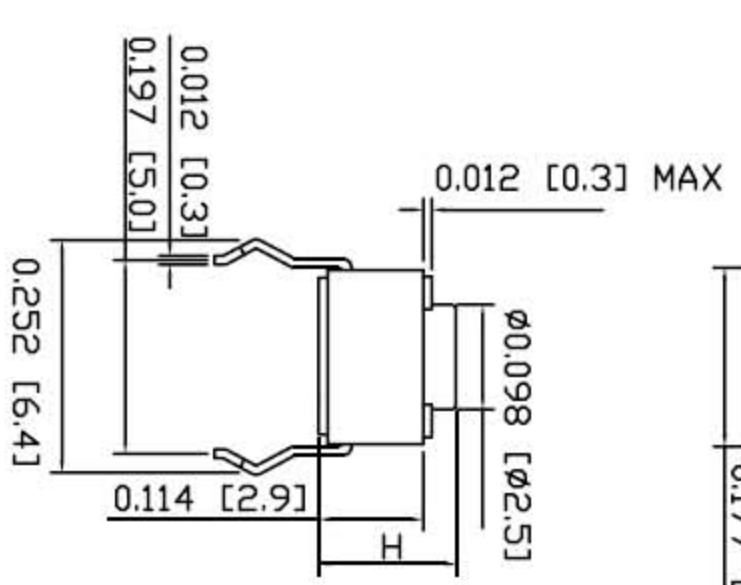

CASE: Thermoplastic, PA66
COVER: Steel
ACTUATOR: Thermoplastic, PA66
CONTACTS: Silver Plated Brass
TERMINALS: Silver Plated Brass
 Bulk packing

How to Order:

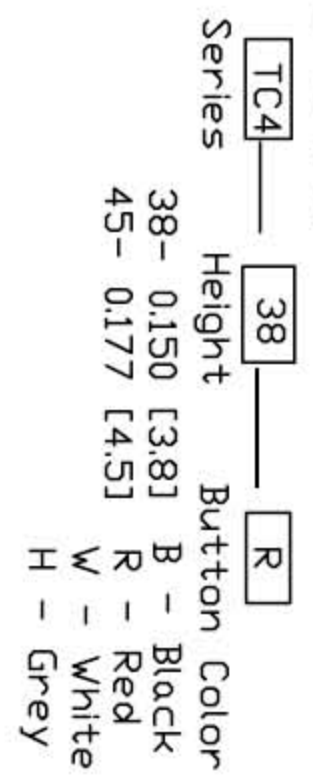

PHASEDA LLC

TC4 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE
 DIMENSIONS ARE IN INCHES [MILLIMETERS]
 TOLERANCES: DEC. X±0.2
 DRAWING NOT TO SCALE
 DATE: JAN 2007

8 7 6 5 4 3 2 1

D C B A