

**SPECIFICATIONS**

2P4T Slide switch

**RATINGS:**

16A 125VAC, 8A 250VAC [UL, cUL]  
 13A 125VAC, 6.5A 250VAC [UL, cUL]

BA 250VAC [TUV]

**CONTACT RESISTANCE:**  
 35mΩ Max.

**INSULATION RESISTANCE:**  
 100MΩ at 500VDC

**WITHSTAND VOLTAGE:**  
 1,500VAC For 1 Minute

**ELECTRICAL LIFE:**  
 >10,000 Cycles

**MATERIALS**







**CASE:**  
 Steel

**TERMINAL BASE:**  
 PC board


**KNOB:**  
 Polyoxymethylene

**CONTACTS:**  
 Silver-Nickel Alloy


**TERMINALS:**  
 Silver Plated Copper

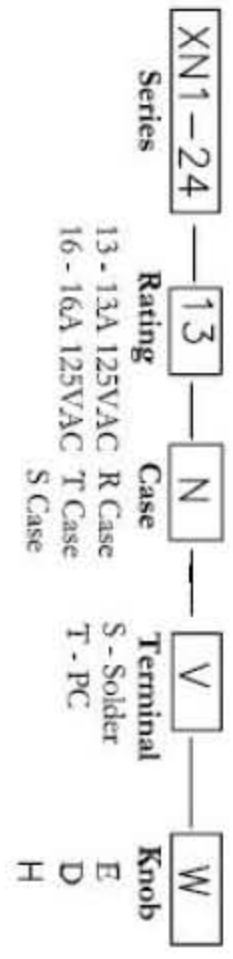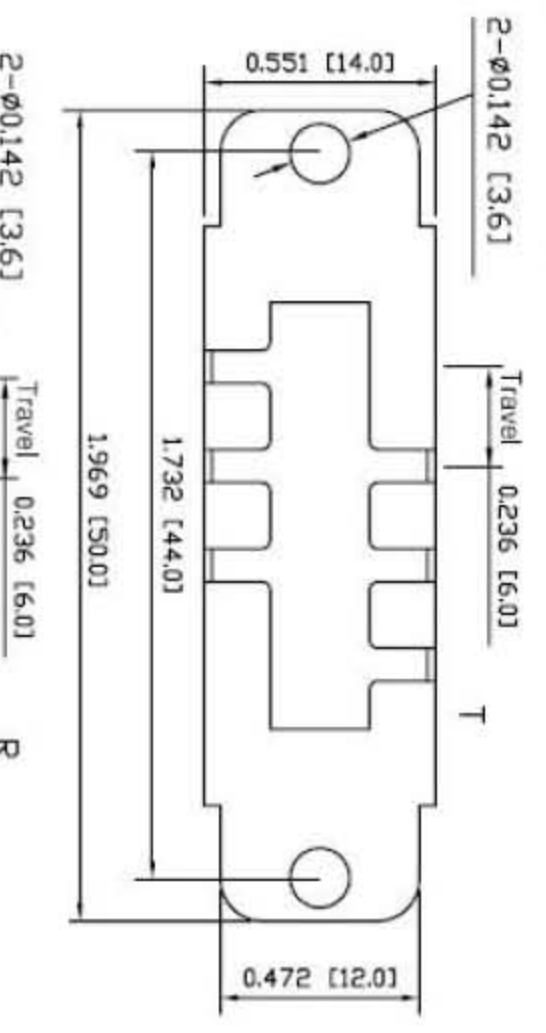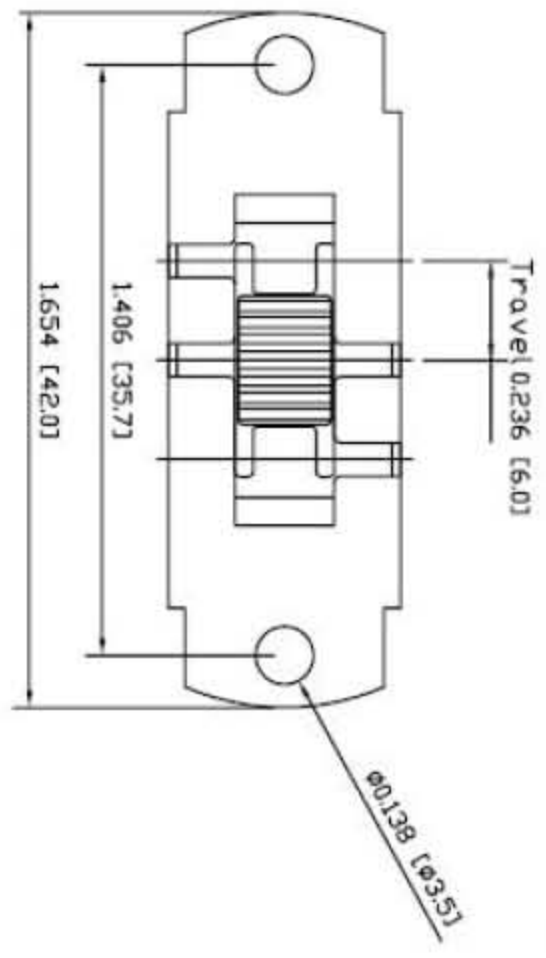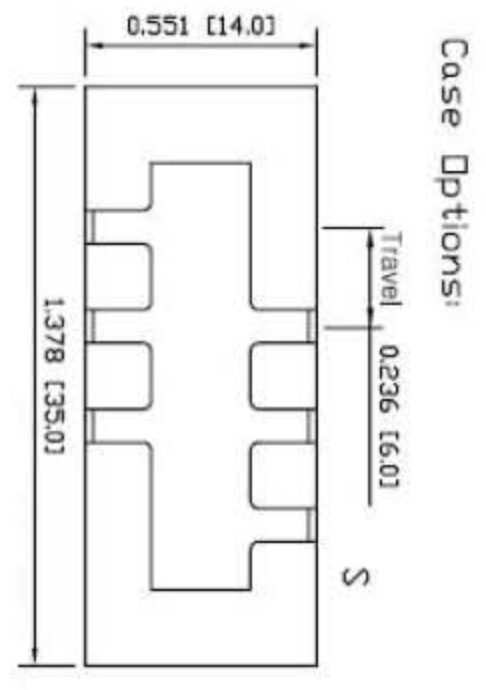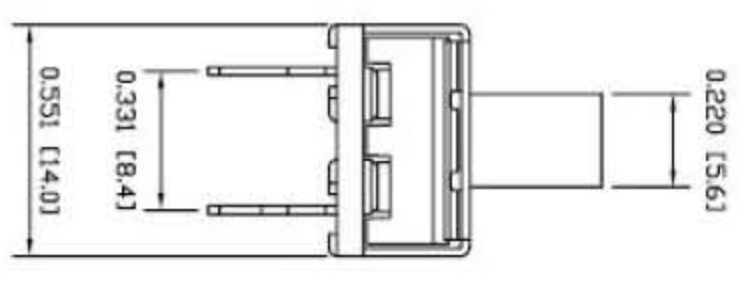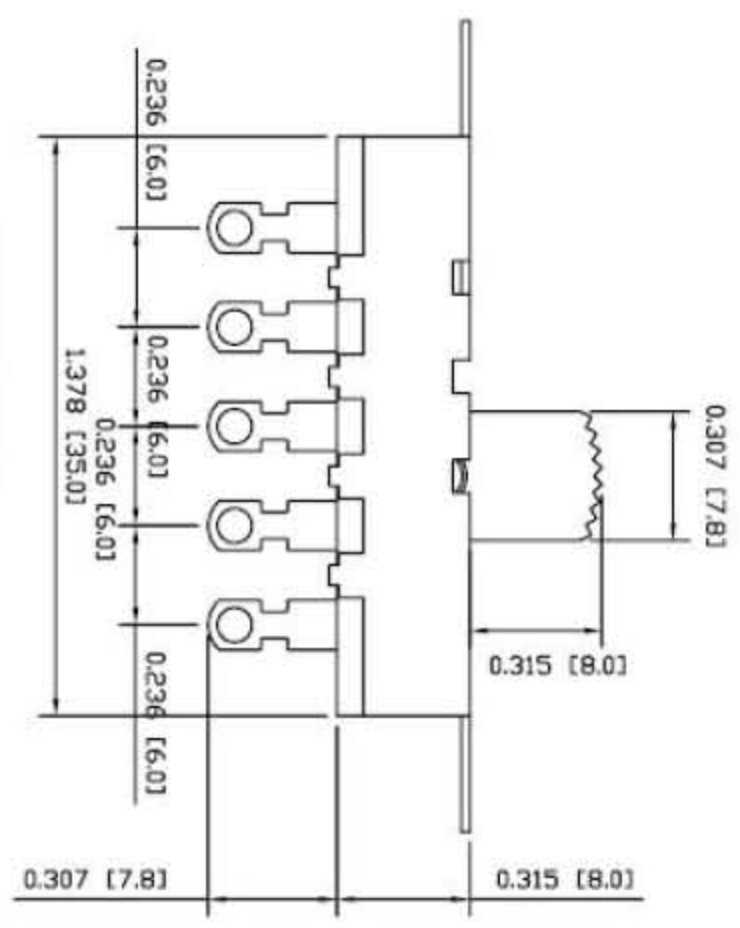

**Knob Options:**

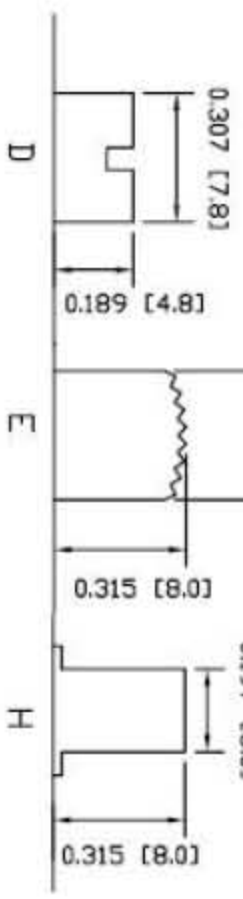

**Terminal Option:**

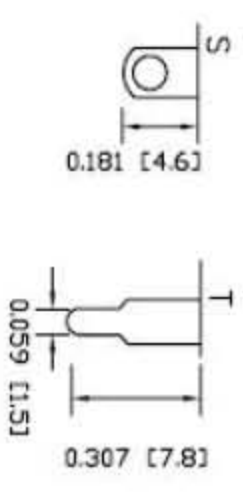

PHASEDA LLC

XN1-24 series

SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE  
 DIMENSIONS ARE IN INCHES [MILLIMETERS]  
 TOLERANCES: DEC. X±0.2  
 DRAWING NOT TO SCALE  
 DATE: JAN 2007

8

7

6

5

4

3

2

1

D

C

B

A