

SPECIFICATIONS

RATINGS:
 20A 125VAC, 16A 250VAC UL, cUL
 1/2HP 125VAC 105°C UL, cUL

CONTACT RESISTANCE:
 35mΩ Max. at 50VDC

INSULATION RESISTANCE:
 100MΩ at 500VDC

WITHSTAND VOLTAGE:
 2,000VAC For 1 Minute

ELECTRICAL LIFE:
 >10,000 Cycles




MATERIAL:

BODY:
 Nylon 103HSL

ACTUATOR:
 Nylon 103HSL

CONTACTS:
 Ag/Cu

TERMINALS:
 Silver Plated Brass

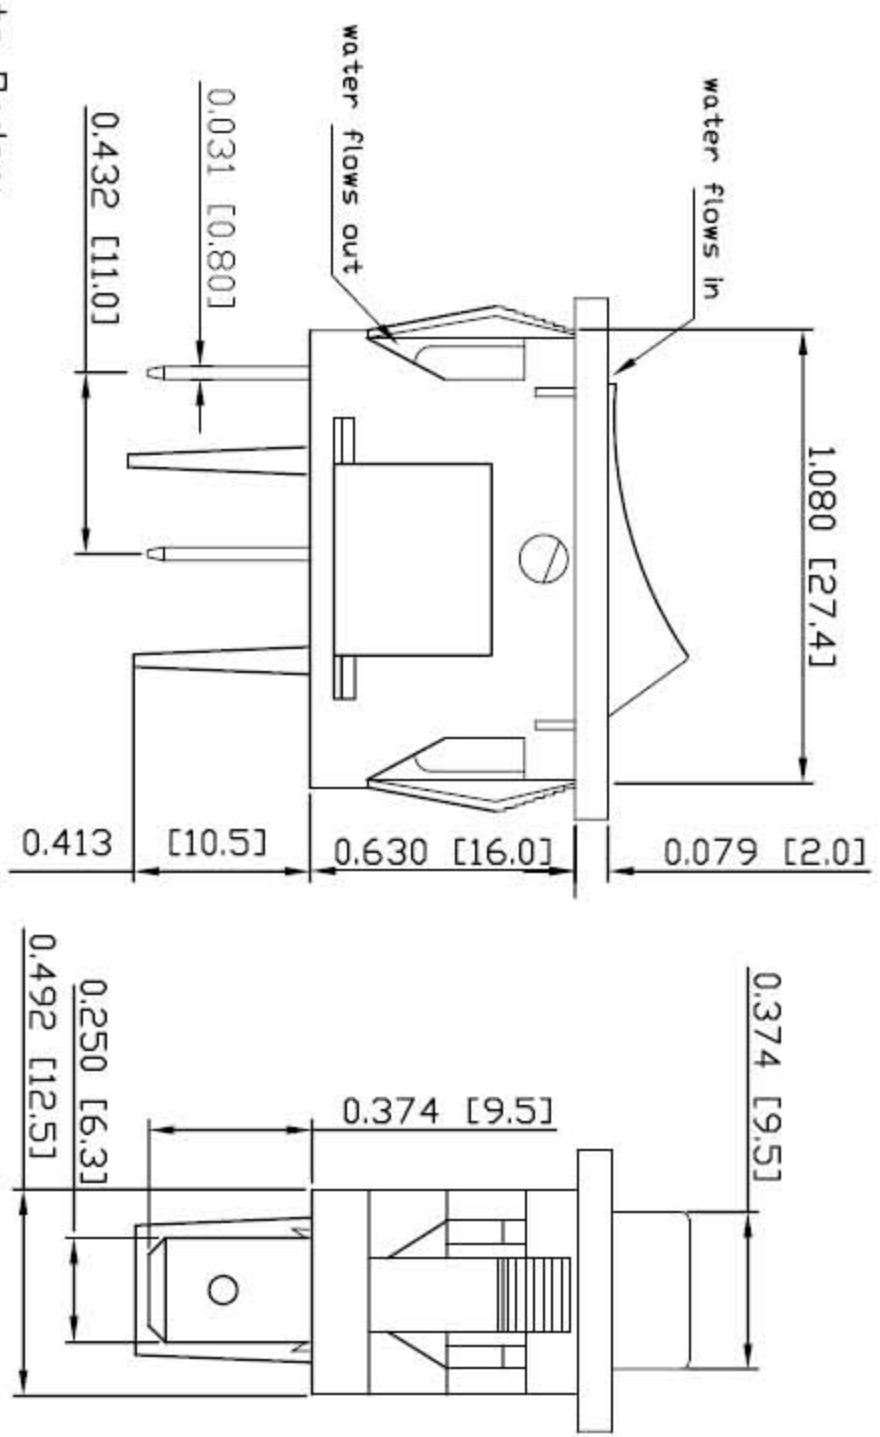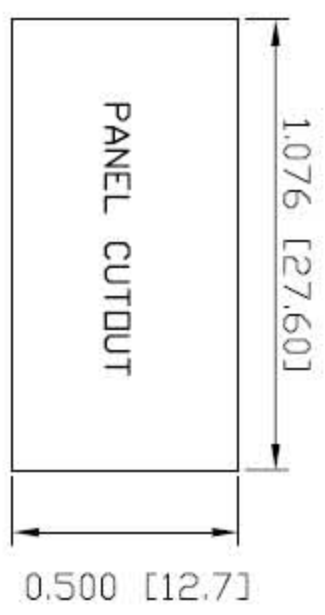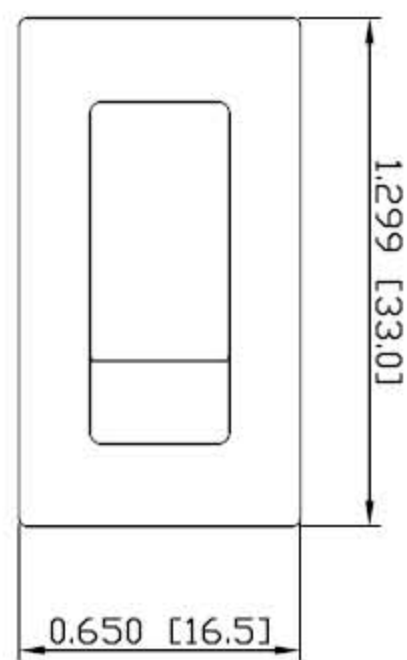

How to Order:

Series **YSR-15** — Function **1** — Marking **2** — Marking Color **W** — Actuator-Body Color **R-B**

Function: 1-ON, OFF; 2-ON, ON; 3-ON, OFF, ON; K-(ON) OFF; C-ON (ON); V-(ON) OFF (ON) (*) Momentary

Marking: blank - no; 2-I O Vert.; 6-I O II Horiz.; 7-I O II Vert.; 8-ON OFF Vert.

Marking Color: blank-no; B-Black; W-White; R-Red

Actuator-Body Color: B-Black; W-White; R-Red; G-Green; J-Orange; H-Grey



PHASEDA LLC

YSR-15 series


SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

DIMENSIONS ARE IN INCHES [MILLIMETERS]

TOLERANCES: DEC. X±0.2

DRAWING NOT TO SCALE

DATE: JAN 2007

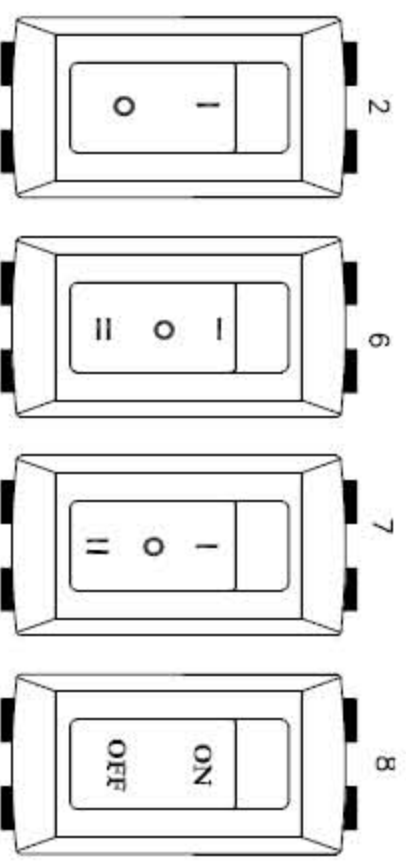

8

7

6

5

4

3

2

1

D

C

B

A